

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
22 November 2001 (22.11.2001)

PCT

(10) International Publication Number  
**WO 01/88222 A1**

(51) International Patent Classification<sup>7</sup>: **C23C 18/12**

(21) International Application Number: **PCT/KR01/00422**

(22) International Filing Date: 16 March 2001 (16.03.2001)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:  
2000-25622 13 May 2000 (13.05.2000) KR

(71) Applicant (for all designated States except US): **KOREA INSTITUTE OF SCIENCE AND TECHNOLOGY** [KR/KR]; 39-1, Hawolgok-Dong, Sungbook-Ku, Seoul 136-791 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KIM, Tae-Song** [KR/KR]; Hyundai 1-cha Apt., 109-405, Dowha 1-dong,

Mapo-ku, Seoul 121-041 (KR). **KIM, Yong-Bum** [KR/KR]; 304-19, Imoon 1-Dong, Dongdaemoon-Ku, Seoul 130-081 (KR). **JUNG, Hyung-Jin** [KR/KR]; Samsungchungdampark Apt. 107-202, 60, Chungdam 1-Dong, Kangnam-Ku, Seoul 135-101 (KR).

(74) Agent: **PARK, Jang-Won**; Jewoo Building 4th Floor 200, Nonhyun-Dong, Kangnam-Ku, Seoul 135-010 (KR).

(81) Designated States (national): JP, US.


(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **HIGH DENSITY CERAMIC THICK FILM FABRICATION METHOD BY SCREEN PRINTING**

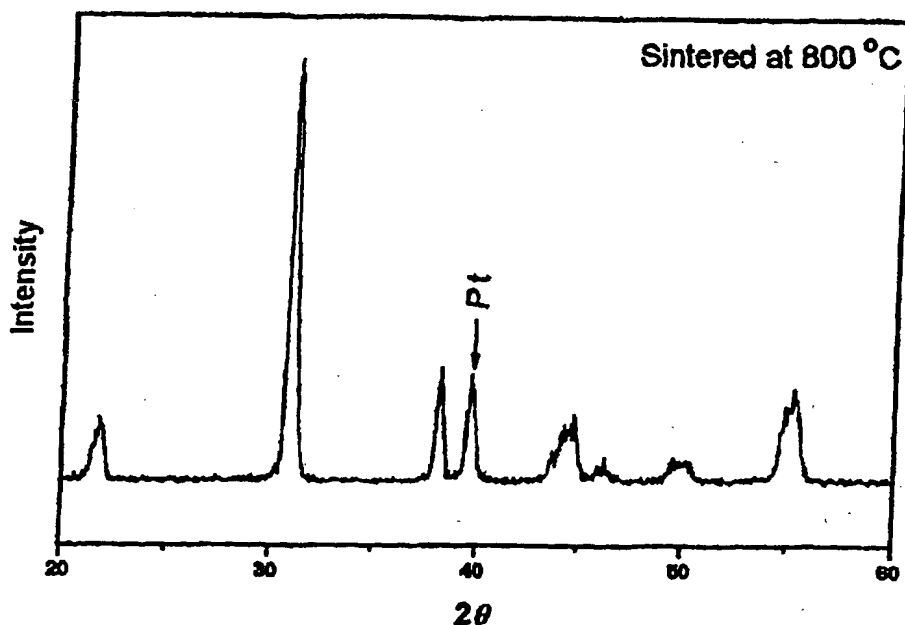

(57) Abstract: A high density ceramic thick film is fabricated by providing vehicle comprising an organic binder and solvent, dispersing ceramic powders into the vehicle to be paste, forming the paste to thick film by screen printing, removing the organic binder from the film, applying sol or sol-like solution to the surface of the film so that the sol or sol-like solution can infiltrate into the film, removing remaining sol or sol-like solution from the surface of the film, drying and preheating the film, and sintering the film.

WO 01/88222 A1